


1


19.5 lb-in
2,2 Nm

RONIS (type EL 11 AP)

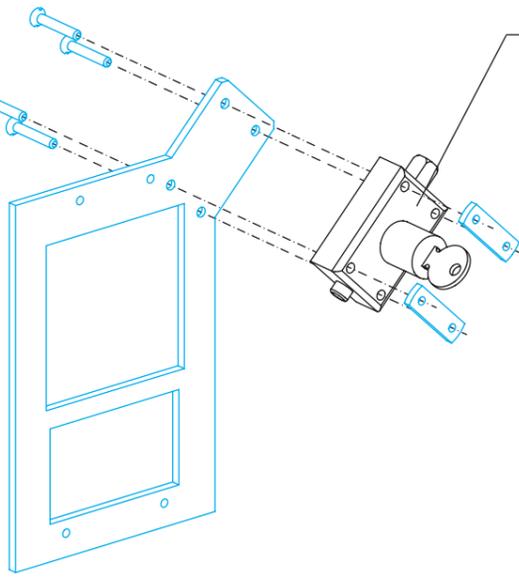

2

8.8 lb-in
1 Nm
Pozidriv

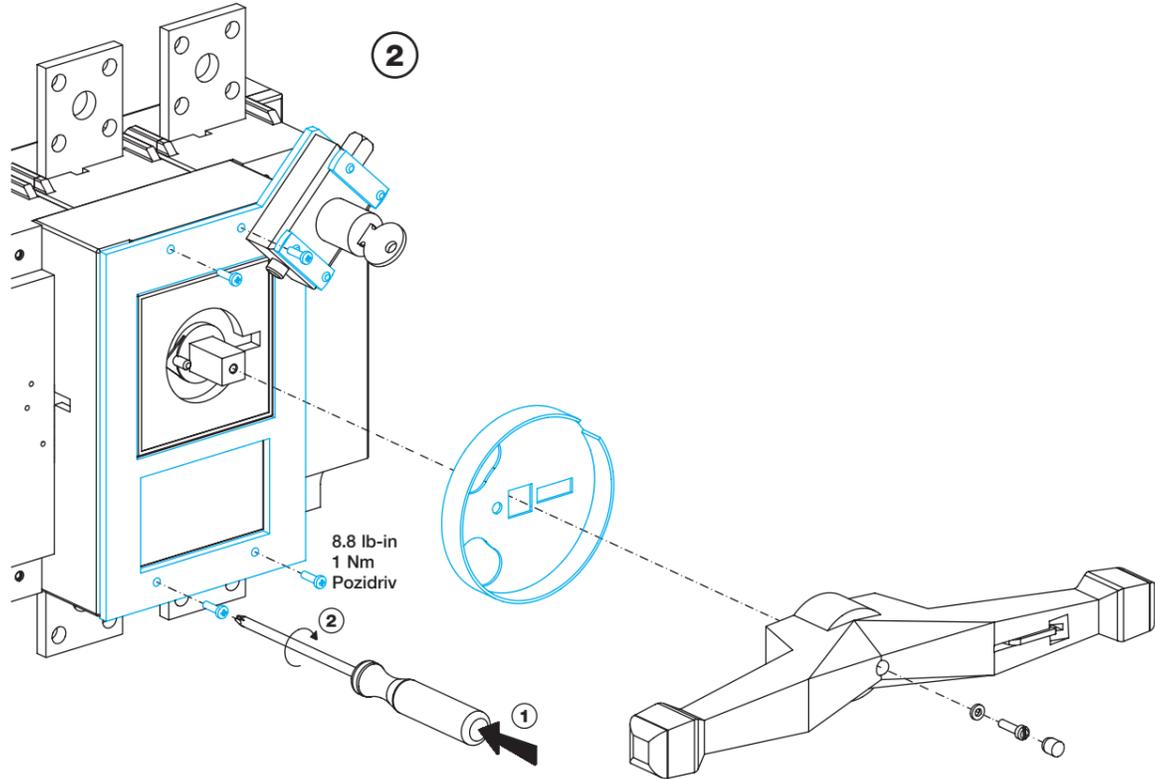

NMO 528940-H




PRF	JMK	10-12-12
ETABLI	VERIFIE	DATE
Issued	Checked	Date


Dual dimensions in
Double dimensions mm

min. Ø 0.19 in / Ø 5 mm
max. Ø 0.31 in / Ø 8 mm

Padlocking the handle
Cadenassage de la poignée

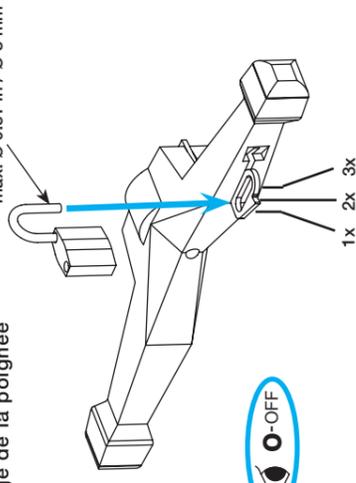


Screw 6.8 Vis 6.8	Tightening torque Couple de serrage	
	Min.	Max.
M 8	73.5 lb-in 8,3 Nm	115 lb-in 13 Nm
M 10	177 lb-in 20 Nm	230 lb-in 26 Nm
M 12	354 lb-in 40 Nm	398.5 lb-in 45 Nm

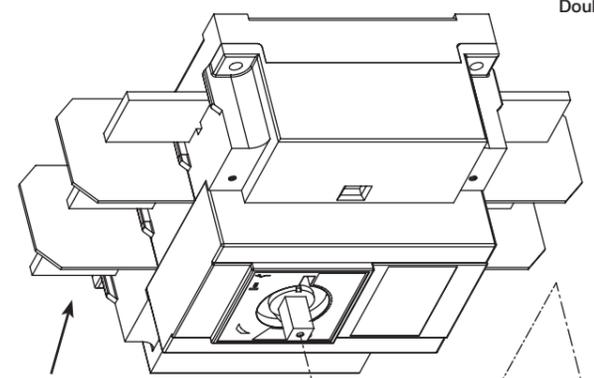


A Direct handle
Commande directe

RECTO-VERSO / S blanc offset 100g/m² / Imp. Bleu prinateone 298C / F 297x420


Mounting orientation
Sens de montage

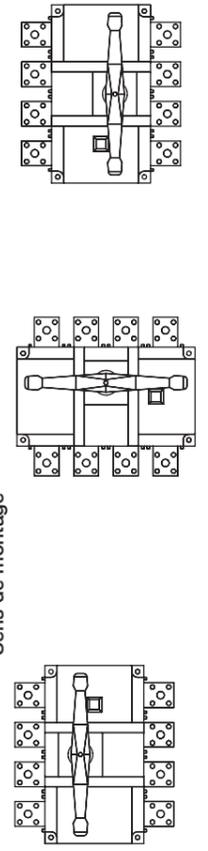


Shaft length
Longueur d'axe

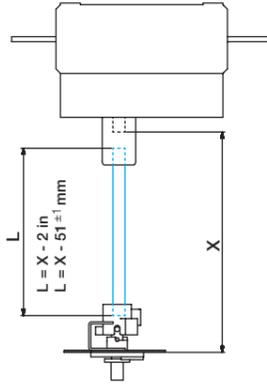

Door drilling
Perçage de porte




C Shaft extension
Prolongateur d'axe

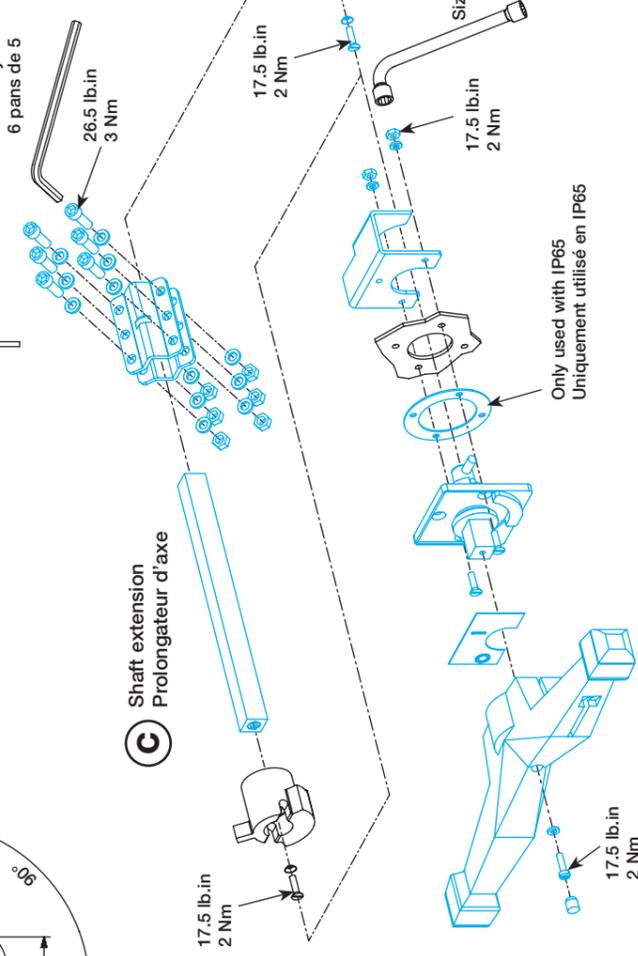


B Door interlocked handle
Commande extérieure

min. Ø 0.19 in / Ø 5 mm
max. Ø 0.31 in / Ø 8 mm


Padlocking the handle
Cadenassage de la poignée

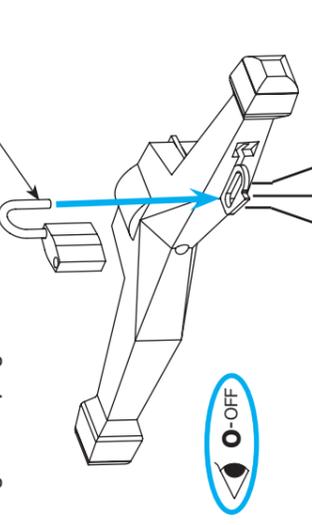


Mounting orientation
Sens de montage

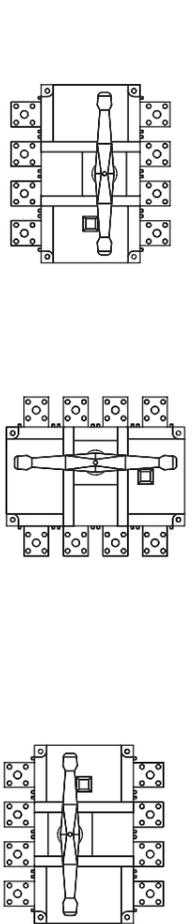


Door drilling
Perçage de porte

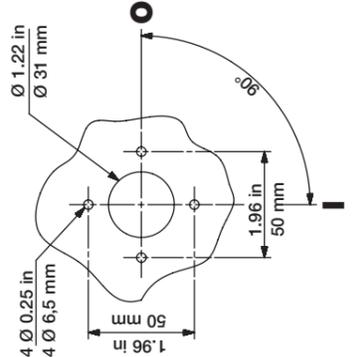


Shaft length
Longueur d'axe

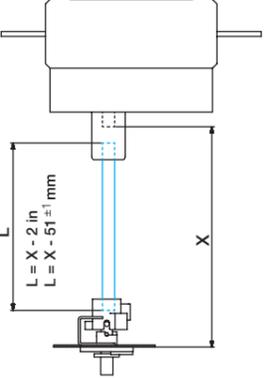

0.19 in
5 mm




Size 10



17.5 lb.in
2 Nm


B Shaft extension
Prolongateur d'axe



17.5 lb.in
2 Nm



A Door interlocked handle
Commande extérieure



17.5 lb.in
2 Nm


62 lb.in
7 Nm
Phillips n° 3




Only used with IP65
Uniquement utilisé en IP65

Dual dimensions in
Double dimensions mm

Screw Vis	Tightening torque Couple de serrage	
	Min.	Max.
M 8	73.5 lb-in 8.3 Nm	115 lb-in 13 Nm
M 10	177 lb-in 20 Nm	230 lb-in 26 Nm
M 12	354 lb-in 40 Nm	398.5 lb-in 45 Nm

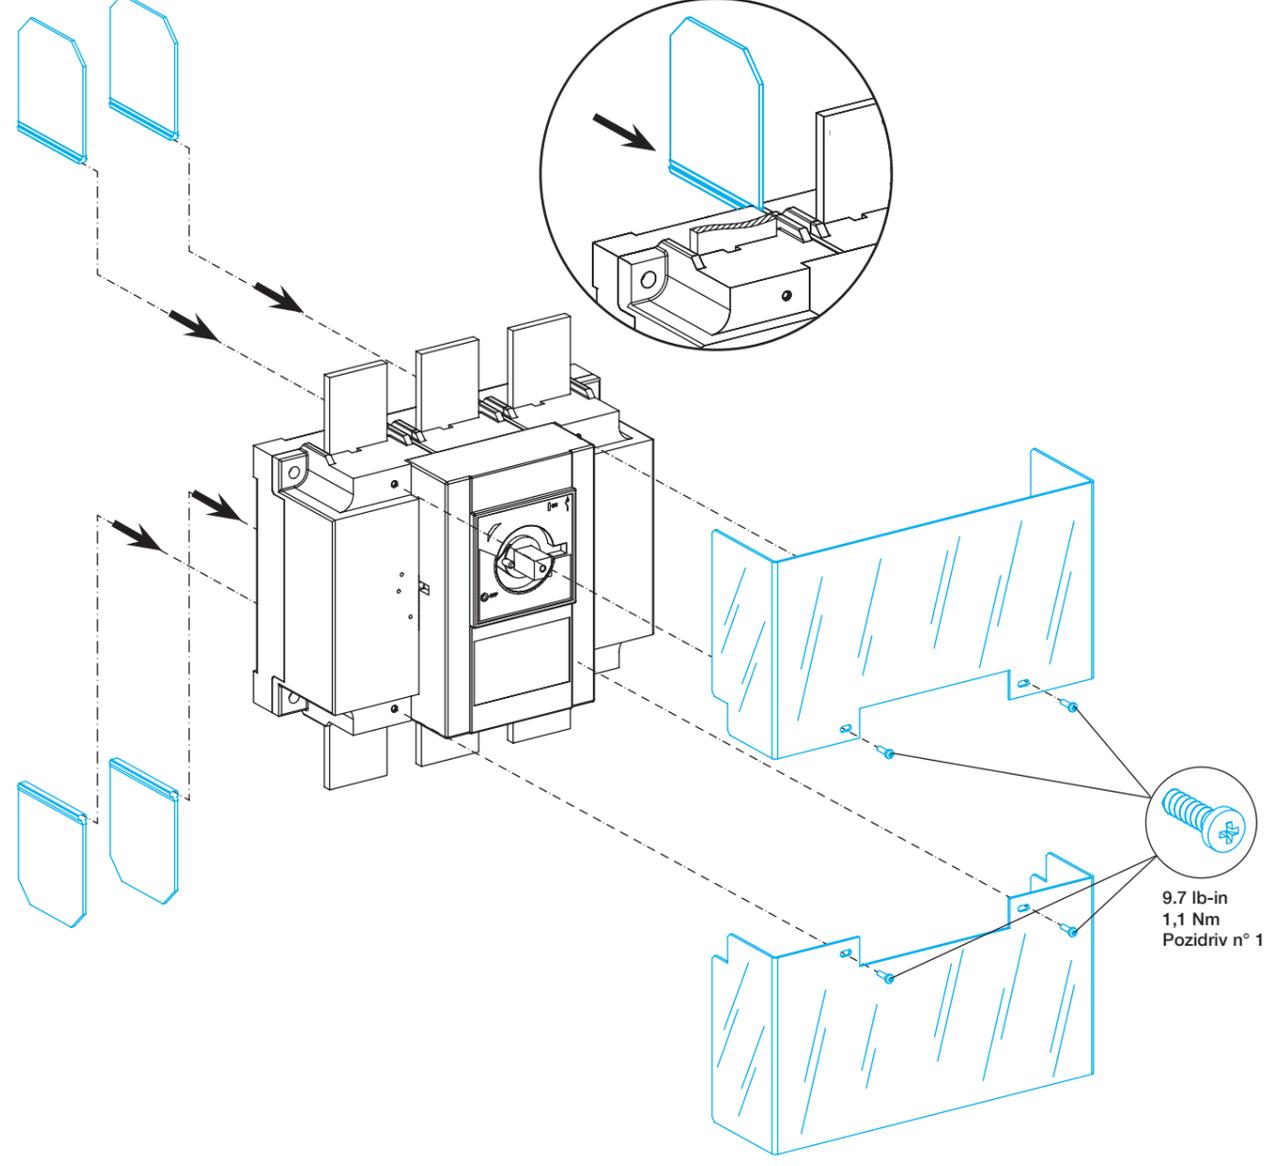

9.7 lb-in
1.1 Nm
Pozidriv n° 1

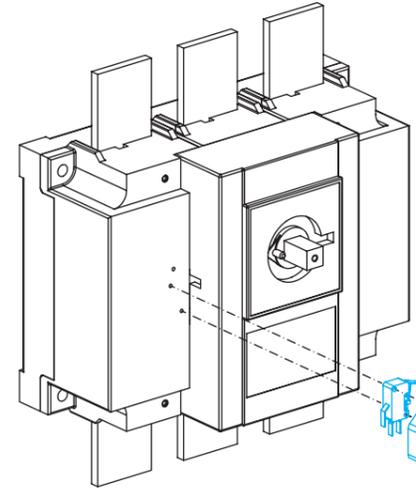

6 lb-in
0.7 Nm
Pozidriv n° 1

